



CONTO D6-Pd

Static meter for direct connection up to 125 A

MAIN CHARACTERISTICS

- DIRECT CONNECTION UP TO 125A IN ONLY 6 MODULES
- NEW DESIGN
- NEW INTERFACE FOR DATA ACCESS, SIMPLE AND FAST
- NEW BACKLIGHT DISPLAY
- RS485 MODBUS COMMUNICATION INTEGRATED
- PULSE OUTPUT
- AVAILABLE ALSO WITH MID CERTIFICATION

COMMANDS



- Metering LED
- Energy values access
- Power values access
- Electrical values and settings access

DISPLAY

- Total/partial Active Energy
- Active Energy tariff 1 and 2
- Total/partial Reactive Energy
- Reactive Energy tariff 1 and 2
- Voltage - Frequency
- Power Factor
- Working hours and minutes
- Istantaneous current
- Instantaneuos Power average/max

CHARACTERISTICS


- Three-phase network, 4-wire
- Direct connection
- Programmable pulse output
- RS485 MODBUS RTU/TCP communication (Option according to the model)
- Sealable terminals block

STANDARDS

ENERGY MEASURE

- CL1 EN/IEC 62053-21 (Active energy)
- CL2 EN/IEC 62053-23 (Reactive energy)
- CL B EN 50470 (Active energy MID)

COMMUNICATION

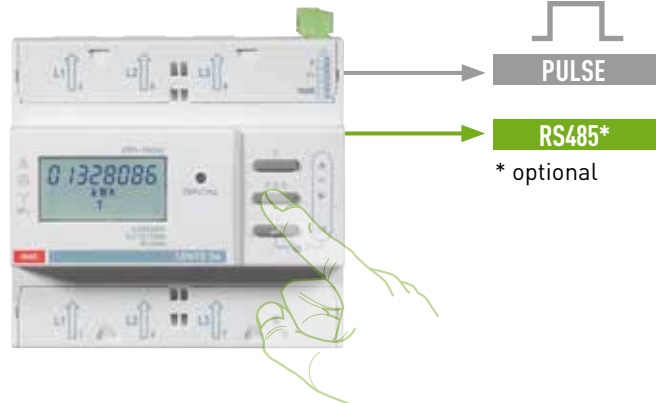

CONTO D6

Cat. Nos.	Network	Output	In (A)	Vn
CE6DT1252	3Ph+N	Pulse output	125	3 x 230/400 V
CE6DT1256		Pulse output + RS485 ModBus		
CE6DMID52*		Pulse output		
CE6DMID56*		Pulse output + RS485 ModBus		

* with MID certification



Via Travaglia, 7 • 20094 Corsico (MI)
 Tel. +39 02 44 878.1 • Fax +39 02 45 03 448
 italia@imeitaly.com • www.imeitaly.com

AD-EX/IME18L1/EN - Version 04/2018