




Pulse SO


Modbus RTU
RI-F200-B-C / RI-F200-G-C

M-Bus
RI-F200-B-MB / RI-F200-G-MB

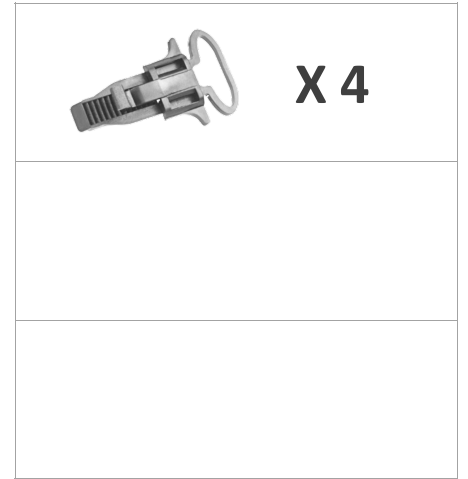

Specifications		Accuracy																										
Wiring Input	3Ø 4 wire, 3Ø 3 wire, 2Ø 3 wire, 1Ø 2 wire	Voltage V L-N and V L-L		±0.5% of full scale																								
Rated Input Voltage	3x 11...300V AC (L-N), 19...519V AC (L-L)	Current		±0.5% of full scale																								
Frequency Range	45...65Hz	Frequency for L-N > 20V, L-L > 35V		±0.1% of full scale																								
CT Primary	1A/5A...10,000A configurable	Active, Reactive and Apparent Power		1%																								
CT Secondary	1A or 5A (max rating x1.2)	Power Factor		±0.01 of Unity																								
VT Primary	100...500kV configurable	Active Energy		Class 1 (IEC/EN 62053-21)																								
VT Secondary	100...500V AC (L-L) configurable	Reactive Energy		Class 2 (IEC/EN 62053-23)																								
Auxiliary / Power consumption	100...240V AC (±15%) 45...65Hz / < 8VA	Wh Resolution and Default Pulse Weight <table border="1"> <thead> <tr> <th>CT Ratio x VT Ratio</th> <th><15</th> <th><150</th> <th><1500</th> <th><15k</th> <th><150k</th> <th>>150k</th> </tr> </thead> <tbody> <tr> <td>Wh / VAh / VAh</td> <td>0.01k</td> <td>0.1k</td> <td>1k</td> <td>0.01M</td> <td>0.1M</td> <td>1M</td> </tr> <tr> <td>INT </td> <td>0.01k</td> <td>0.1k</td> <td>1k</td> <td>0.01M</td> <td>0.1M</td> <td>0.1M</td> </tr> </tbody> </table>						CT Ratio x VT Ratio	<15	<150	<1500	<15k	<150k	>150k	Wh / VAh / VAh	0.01k	0.1k	1k	0.01M	0.1M	1M	INT	0.01k	0.1k	1k	0.01M	0.1M	0.1M
CT Ratio x VT Ratio	<15							<150	<1500	<15k	<150k	>150k																
Wh / VAh / VAh	0.01k	0.1k	1k	0.01M	0.1M	1M																						
INT	0.01k	0.1k	1k	0.01M	0.1M	0.1M																						
Display Update Rate	1 sec all parameters																											
Operating / Storage Temperature	-10...55°C / -20...70°C	Example If CT = 100/5A (CT ratio = 20) & VT = 350/350V (VT Ratio = 1) Wh resolution = 0.1kWh (20 x 1 = <150) Pulse O/P default = 0.1kWh/pulse																										
Humidity	0...85% non-condensing																											
Protection Degree (IEC/EN60529)	IP54 Front only (rubber gasket fitted)																											
Pulse Output	External 5...27V DC / 100mA max																											
Pulse Resolution / Duration	0.01...99.99kWh per imp / 0.1...2 sec																											
Communication	Modbus RTU over RS485 M-Bus (EN13757)																											

MECHANICAL INSTALLATION

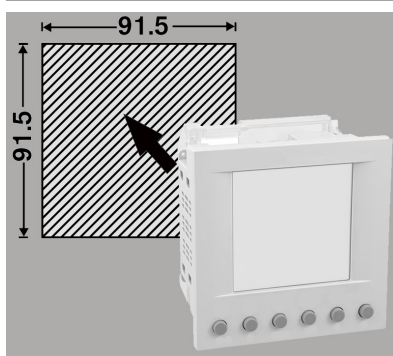

Installation & Environmental

Panel mounted, indoor used only.
 Installation category: III (300V L-N)
 Altitude: up to 2000 m
 Protection Class: II
 Pollution degree: II

All terminal covers must be fitted after wiring

PRODUCT SAFETY

Safety related notification, symbols and instructions that appear in this operating manual or on the equipment must be strictly followed to ensure the safety of personnel as well as the instrument. If the equipment is not used in a manner specified by the manufacturer it may impair the protection provided by the equipment

- Do not use the equipment if there are mechanical damage
- Do not exceed the stated maximum ratings of the device
- No repairs, maintenance or adjustments are possible
- Read the complete instruction manual prior to installation or operating the unit
- The equipment in its installed state must not come into close proximity to any heating sources, oils, steam, caustic vapours or other unwanted process by-products
- Do not use in hazardous or classified location where explosion or other dangers can be triggered by the device

INSTALLATION PRECAUTIONS

Risk of electric shock!
 Only to be installed by a competent person

- To prevent the risk of electrocution, always isolate and lock-off the power supply to the equipment prior to undertaking any work
- Always confirm absence of electricity prior to starting work using appropriate voltage detection equipment
- Wiring shall be done strictly according to the terminal layout
- Confirm that all connections are correct before energizing the equipment
- Routing of cables shall be way from any internal EMI source
- Copper cable should be used
- All wiring to be in accordance with applicable local standards

WIRING

**3P4W
3 CTs**

**3P3W
2 CTs**

**2P3W
2 CTs**

**3P4W
3 CTs
3 VTs**

**3P3W
2 CTs
2 VTs**

**2P3W
2 CTs
2 VTs**

**1P2W
1 CT**

5 - 27Vdc

1 Fuse class CC UL / fast acting 600V Rating 0.5A

2 For 'Volt-free' PLC or digital input, voltage must be provided by the addition of a DC PSU

Single Core
0.5 > 4mm²
Ø 2.5mm max

Stranded
0.5 > 2.5mm²
Ø 2.5 mm

0.8 Nm Max

⚠ Voltage and current must be from same phase


Modbus / MBus

Typical Modbus configuration shown
For MBus interface follow Wiring Topology below

Wiring Topology	A B	 Daisy Chain	 Star Network
Modbus	+ -	✓	✗
MBus	1 2	✓	✓

CONFIGURATION

Step A: Enter Configuration Menu

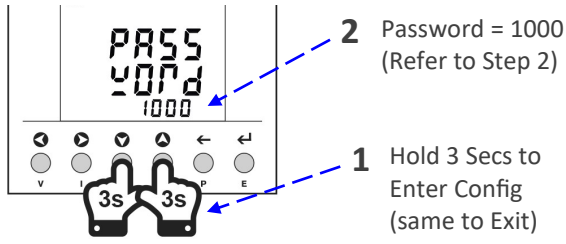


Step B: Configure each setting, as required, referring to Settings Table below, using the buttons as follow:

1		Press either button once to make digit or option flash, press again to move flashing cursor
2		Press to change digit or option, press or to move cursor position as required
3		Press to save and move to next setting option, Exit menu once all settings are configured (see Step 1)

F200-X-C	F200-X-MB	Setting	Default 	Adjustment Range 	Network & CT Must configure	VT Adjust if Using VT	Comms Modbus / MBus	Pulse O/P Adjust if utilised	System Settings Optional
1	1	Change Password	1000	NO / YES (0000 - 9998)					✓
2	2	Phase Network Selection	3P4W	3P4W 3P3W 1P2W-P1	✓				
3	3	CT Secondary (see CT Label)	5	1A / 5A	✓				
4	4	CT Primary (see CT Label)	5	1A/5A > 10000A	✓				
5	5	PT Secondary	350	100V > 500V		✓			
6	6	PT Primary	350	100V > 500kV		✓			
7	7	Slave ID <i>Modbus:</i> <i>MBus (Primary ID):</i>	1 1	1 > 255 1 > 250			✓		
8	8	Baud rate <i>Modbus:</i> <i>MBus:</i>	9600 2400	300 > 19200 bps 1200 > 9600			✓		
9	9	Parity <i>Modbus:</i> <i>MBus:</i>	None Even	None / Odd / Even Even			✓		
10	10	Stop Bit <i>Modbus:</i> <i>MBus:</i>	1 1	1 / 2 1			✓		
11	11	Back Light Off (0000 = Never)	0000	0 > 7200 Sec					✓
12	12	Demand interval method	Sliding	Sliding / Fixed					✓
13	13	Demand interval duration	15	1 > 30					✓
14	14	Demand interval length	1	1 > 30 min					✓
15	15	Max Auto Display Pages	21	1 > 21					✓
16	16	Change Page Sequence	1 > 21	No / YES (1 > 21)					✓
17	17	Pulse Weight	0.01	00.01 > 99.99 kWh/imp				✓	
18	18	Pulse Duration	0.1	0.1 > 2.0 Sec				✓	
X	19	MBus Secondary ID	Serial #	0000 0000 > 9999 9999			✓		
19	20	Factory Default	No	No / Yes	Does not reset energy & demand values				✓
20	21	Reset Energy	No	No / Yes (Password +1)	Once entered, reset each value individually				✓
21	22	Reset Demand	No	No / Yes					✓
22	23	Reset Auxiliary Switch ON	No	No / Yes					✓

OPERATION

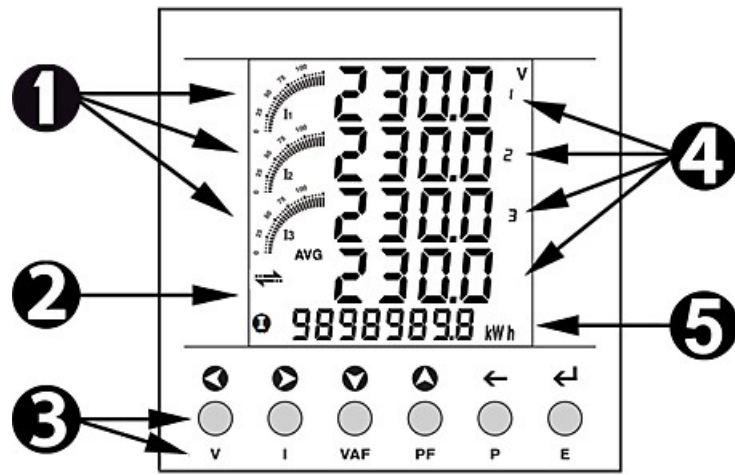

- 1 Current level bar graph (% of CT current rating)
- 2 Functions & displayed measurement indicators:
 - RS485 communication in progress
 - Integration of energy (blinks every 5 sec)
 - Σ Sum of 3-phase
 - AVG Average of 3-phase
 - DMD Max/Min Demand
 - TH Total Harmonic Distortion (THD)
 - IP Imported Energy (positive value)
 - EP Exported Energy (negative value)
 - Total Sum of 3-phase Energy (IP or EP)
 - Net Sum of IP + EP Energy
- 3 Function buttons and function symbols
- 4 Phase & total or average instantaneous measurements (V, A, PF, Hz, kW, kVAr, kVA) >> **V/I/VAF/PF/P buttons**
- 5 Energy readings (kWh/kVArh/kVAh) >> **E button**

No. of Presses	V	I	VAF	PF	P
x1	Voltage (L-N)	Current	L1: V/A/PF/Hz	Power Factor	Active Power - kW
x2	Voltage (L-L)	Current Max DMD	L2: V/A/PF/Hz	Hold 10 sec displays Serial #	Reactive Power - kVAr
x3	% THD (L-N)	% THD	L3: V/A/PF/Hz		Apparent Power - kVA
x4	% THD (L-L)	Hold 10 sec Reverse Indication 0 = None 1, 2 or 3 = Reversed	Avg: V/A/PF/Hz		L1: kW/kVAr/kVA/PF
x5					L2: kW/kVAr/kVA/PF
x6					L3: kW/kVAr/kVA/PF
x7					Σ : kW/kVAr/kVA/PF
x8					Max DMD: kW/kVAr/kVA
x9					Min DMD: kW/kVAr

1. L-N parameters are not displayed For 3P3W
2. Parameters in **BOLD** not displayed for 1P2W

	x1 > 9	Active Energy - kWh		L1 IP	L2 IP	L3 IP	L1 EP	L2 EP	L3 EP	Σ IP	Σ EP	Net (IP + EP)
	x10 > 18	Reactive Energy - kVArh		L1 IP	L2 IP	L3 IP	L1 EP	L2 EP	L3 EP	Σ IP	Σ EP	Net (IP + EP)
	x19 > 22	Apparent Energy - kVAh		L1	L2	L3	Σ	Hold 10 sec - change Page Scroll				
	x23 > 24	Run Hour (0.01 hr = 36 sec)		Number of Auxiliary Switch ON			Auto <-> Manual					

Voltage Phase Sequence

OK-CLK: L1 → L2 → L3 ✓

ANTI-CK: Incorrect Order

INVAL Id: Missing Phase ✗

Hold 3 sec