
easy wire - Multifunction Power Meter - Panel Mounting- LCD Display




- 96 x 96mm flush mounting
- · Single phase or 3 phase 4 wire network balanced or unbalanced load
- · Built-in energy pulse output
- Single slot for plug in communication module (RS485 or RS232)
- · Wide range of measured parameters (see table below)
- · Backlit LCD display
- · 330mV current transformer input
- · Active energy class 1 (EN62053-21)
- Reactive energy class 2 (EN62053-23)
- 3-phase: 140...460Vac measured voltage
- Single phase: 80...265Vac measured voltage
- Self supplied auxiliary

- Programmable CT ratio 1...9999A
- Programmable VT ratio 1...10 (max VT primary 1200V)
- Programmable display contrast and backlight intensity
- · Selectable CT phase correction allows reversal of L1 and L3
- · Weight 285g

Function Diagram

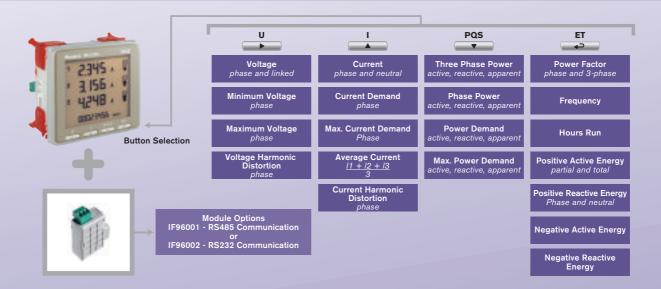

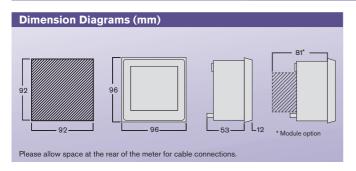

How to Order / Model Reference MF96300 / IF96001 Model MF96300 Output With built-in pulse output Output Modules With RS485 modbus RTU Module IF96001 With RS232 modbus RTU Module IF96002 Mating halves of connectors and leads NOT supplied with meter-See Essential Extras and Accessories on page 17.