

TAS249-EW

easywire - Three Phase Measuring Current Transformers

Description

The TAS249-EW is a 90mm wide three phase measuring current transformer designed for use with the Easywire multifunction power meters. This current transformer has three 16 x 20mm holes and is available with primary currents from 60 to 160A.

Internal safety circuitry is provided which limits the output voltage to a safe level, allowing the transformer secondary to be left disconnected under load.



Fixing


DIN rail mounting clip, Busbar mounting and fixing feet included.



- Accuracy Class 1
- Aperture: 3 @ 16 x 20mm
- Primary Current: 60 to 160A
- 29mm hole centres
- Housing Material Self extinguishing Nylon IEC185 classification VO according to UL-94
- Reference standard EN60044-8
- Weight : 500g

Installation


The TAS249-EW uses the Rayleigh Instruments Easywire technology allowing much faster installation saving you time and money.

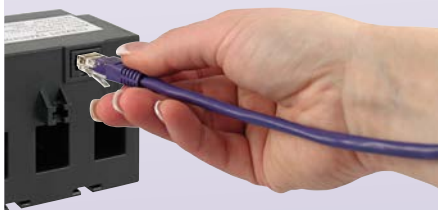

Additionally, all our three phase current transformers have been designed with hole centres and apertures to fit most standard industrial circuit breakers.



Dimensions (mm)

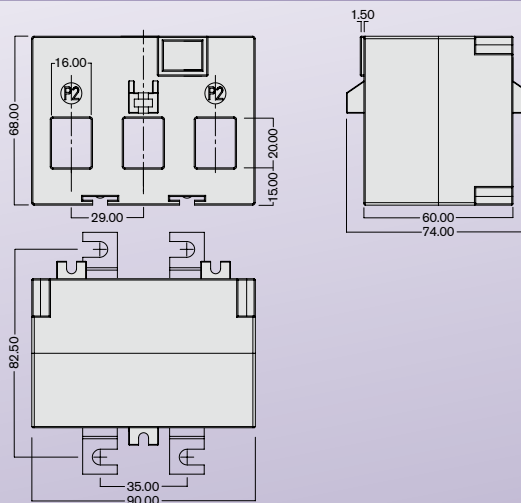

Current Transformer Ratios

Primary Current	Output	Code
60	330	060
100	330	100
125	330	125
150	330	150
160	330	160

330mV Secondary

How to Order / Model Reference

eg **TAS249EW 160 /330MV**

Model	TAS249EW		
Primary Current			
Select code from ratio table above		???	
Secondary Current			/330MV