

Head Office

Rayleigh Instruments Limited

Raytel House, 1-5 Cutlers Road,
South Woodham Ferrers,
Chelmsford,
Essex CM3 5WA. UK

Tel. : +44 (0)1245 428500

Email : sales@rayleigh.com

Web : www.rayleigh.com

Eastern European Office

Rayleigh Instruments Sp. z o.o.

ul. Aleje Jerozolimskie 214,
02-486, Warszawa. Poland.

Tel. : +48 22 290 27 26

Email : sales@rayleigh.pl

Web : www.rayleigh.pl

RI-ENERGYSET 50KW/100KWh

G100 Compliance Certificate for Export Limitation Systems (ELS)

Compliance Statement:

This certificate confirms that the RI-ENERGYSET hybrid inverter, manufactured by RAYLEIGH INSTRUMENTS LIMITED, meets the regulatory requirements outlined in the Technical Guidelines for Customer Export Limiting Schemes G100. These guidelines pertain to photovoltaic systems utilizing our hybrid inverters weather in DC coupled or AC coupled configuration.

To implement export limitation, the RI-ENERGYSET utilizes the supplied RI-D140-C meter with its split core current transformer via a Modbus communication interface.

It is crucial to establish fail-safe communication links between the components (inverters and electricity meter) of the export limiter scheme, as mandated by UK DNOs (Distribution Network Operators), to ensure specific power quality.

Requirement 1: The scheme necessitates hard-wired communication links among the various components.

Communication is achieved through a hard-wired Modbus RS485 output.

Requirement 2: The export limitation scheme must transmit signals to the generation system to reduce output within 1 second.

The current transformer measures current values, and the energy meter RI-D140-C calculates the active power, sending the measured data to the RI-EERGYSET inverter. The inverter controls the AC output power, while the built-in MPPT controller adjusts the power transfer from the panels to the inverter output.

Requirement 3: The scheme must operate in a fail-safe manner and limit export if the export limiter fails or loses its power supply.

In the event of a failure of the Rayleigh Instruments local controller, meter, or current transformer, the exported energy will be maintained at or below the agreed level initially set.

- Current Transformers
- Energy Monitoring
- Inverters and Batteries
- Relays & Timers
- Safety
- Temperature & Pressure
- Instrumentation
- Energy Metering
- Monitoring and Control Software

Head Office

Rayleigh Instruments Limited

Raytel House, 1-5 Cutlers Road,
South Woodham Ferrers,
Chelmsford,
Essex CM3 5WA. UK

Tel. : +44 (0)1245 428500

Email : sales@rayleigh.com

Web : www.rayleigh.com

Eastern European Office

Rayleigh Instruments Sp. z o.o.

ul. Aleje Jerozolimskie 214,
02-486, Warszawa. Poland.

Tel. : +48 22 290 27 26

Email : sales@rayleigh.pl

Web : www.rayleigh.pl

Requirement 4: When the export limitation scheme is active, it will reduce the exported active power to a value equal to or lower than the agreed export capacity.

The export control circuit limits power export peaks of typical load steps within 5 seconds.

RI-ENERGYSET-3P-ESS-50-100

(1x RI-ENERGYFLOW-3P-50-HYBRID and 1x RI-ENERGYPACK-3P-ESS-50-100)

Single PCS- Single BAT

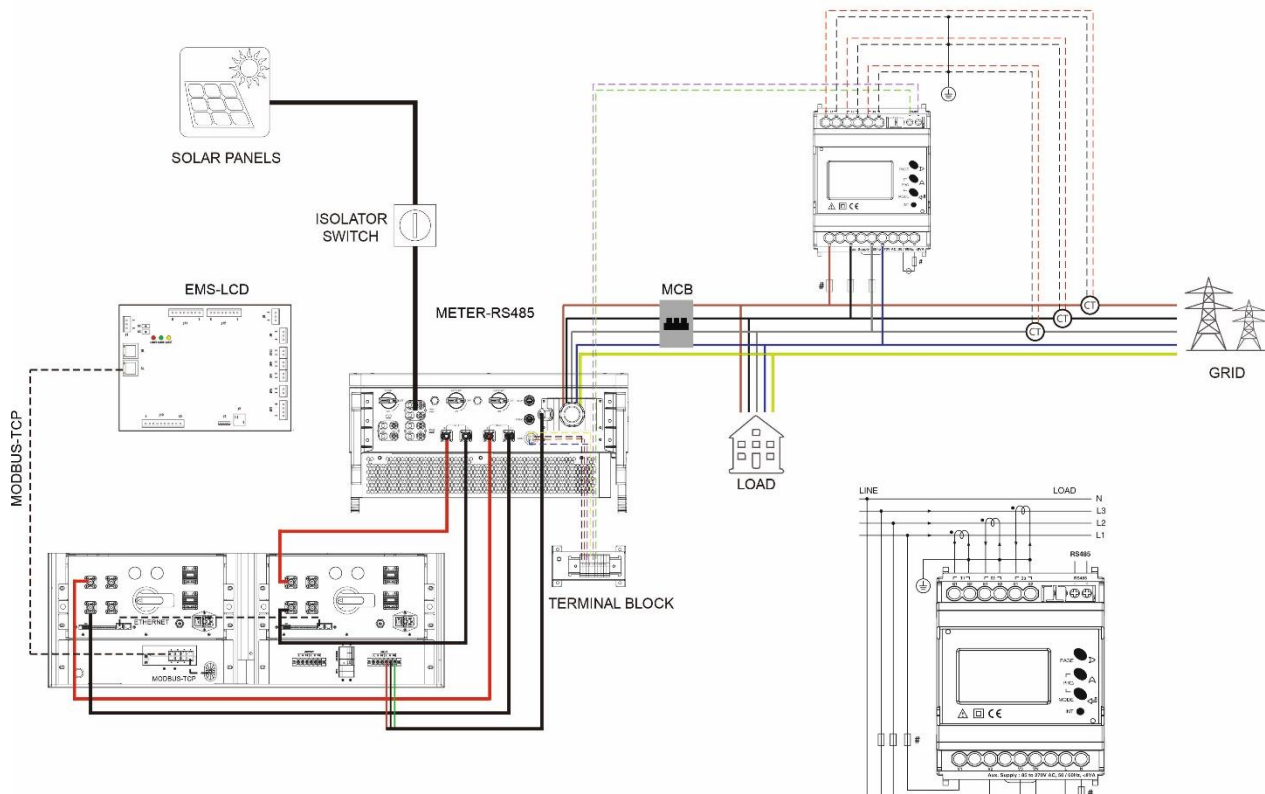


Figure 1 illustrates the configuration of the ELS for the ENERGYSET 50K Hybrid Solar Inverter.

- Current Transformers
- Energy Monitoring
- Inverters and Batteries
- Relays & Timers
- Safety
- Temperature & Pressure
- Instrumentation
- Energy Metering
- Monitoring and Control Software

Head Office

Rayleigh Instruments Limited

Raytel House, 1-5 Cutlers Road,
South Woodham Ferrers,
Chelmsford,
Essex CM3 5WA. UK

Tel. : +44 (0)1245 428500

Email : sales@rayleigh.com

Web : www.rayleigh.com

Eastern European Office

Rayleigh Instruments Sp. z o.o.

ul. Aleje Jerozolimskie 214,
02-486, Warszawa. Poland.

Tel. : +48 22 290 27 26

Email : sales@rayleigh.pl

Web : www.rayleigh.pl

The RI-D140-C meter serves as the power measurement unit, while the export limitation is solely calculated by the hybrid inverter. The solar inverter adjusts the power from the PV modules by controlling the operating points, ensuring that excess energy is not generated from the solar PV panels. Rayleigh Instruments inverters do not employ resistive, inductive, or any other form of load to dissipate excessive energy, including water heaters. Therefore, no additional harmonics are introduced due to the functioning of the Export Limitation System. The harmonics generated by the inverters are specified in the respective G98/G99 certifications. The ELS can be programmed with a site export limit in watts, and only advanced setting access levels can adjust it to prevent unauthorized overrides. Setting the limit to zero will cause the inverters' output relays to open circuit, resulting in a true zero output.

Additionally, there is an option to set P (U) limits if specifically requested by the DNO to prevent exported power from exceeding statutory voltage limits. The regulation states that the ELS must detect any excursion.

Ryan Welshman

Ryan Welshman
Sales Director

- Current Transformers
- Energy Monitoring
- Inverters and Batteries
- Relays & Timers
- Safety
- Temperature & Pressure
- Instrumentation
- Energy Metering
- Monitoring and Control Software

Directors: R. Lawrence (Chair),
D. G. Brookes (MD),
T. Hawkins, R. Welshman
Secretary: E. C. Biddle

Registered Office: As above UK address.
No. 808961.

VAT Number: GB394960700