


**Features**

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset or field adjustable
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

**Operating Specifications**

<b>Set Point Range</b>	3" — 29" Hg	(76mm — 736mm Hg)
<b>Set Point Tolerance</b>	±2" Hg	(50mm Hg)
<b>Maximum Operating Pressure</b>	250 PSI	(17 Bar)
<b>Differential</b>	20 — 40%	
<b>Current Rating</b>	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
<b>Media Connection</b>	Standard: Brass ( <i>Optional: Aluminum, Nickel Plating, Delrin, 303 SS, 316 SS</i> )	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna N	
<b>Cycle Life</b>	1 Million	

**How to Order** (Example: Part Number: **NV- 1A - 20R / QC** \*)

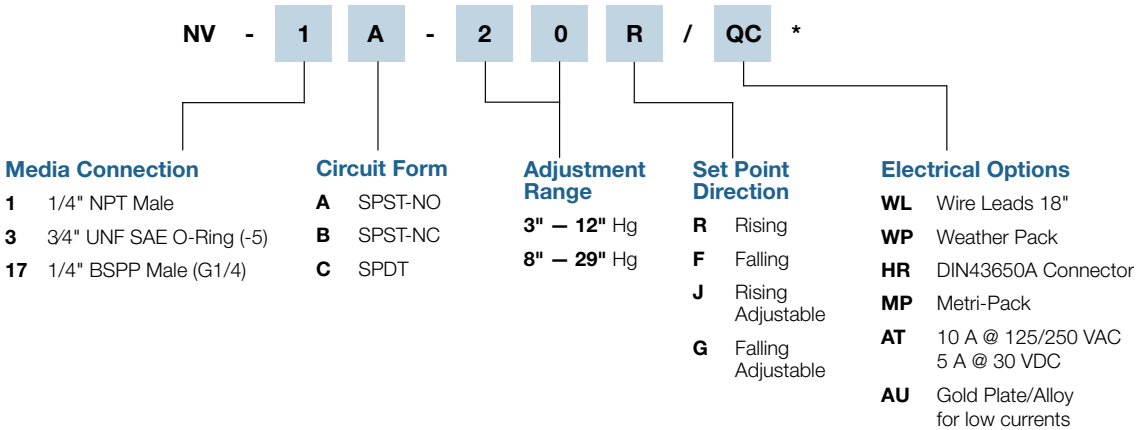

\* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.