

UL **CE** **RoHS**


Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset or field adjustable
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

Set Point Range	1" – 29" Hg	(25mm – 736mm Hg) 14" – 394" H ₂ O
Set Point Tolerance	±2" Hg	(50mm Hg)
Maximum Operating Pressure	250 PSI	(17 Bar)
Differential	20 – 40%	
Current Rating	10 A @ 125/250 VAC	5 A @ 30 VDC
Media Connection	Zinc Plated Steel	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	

How to Order (Example: Part Number: **VP - 1A - 25R / MP**)

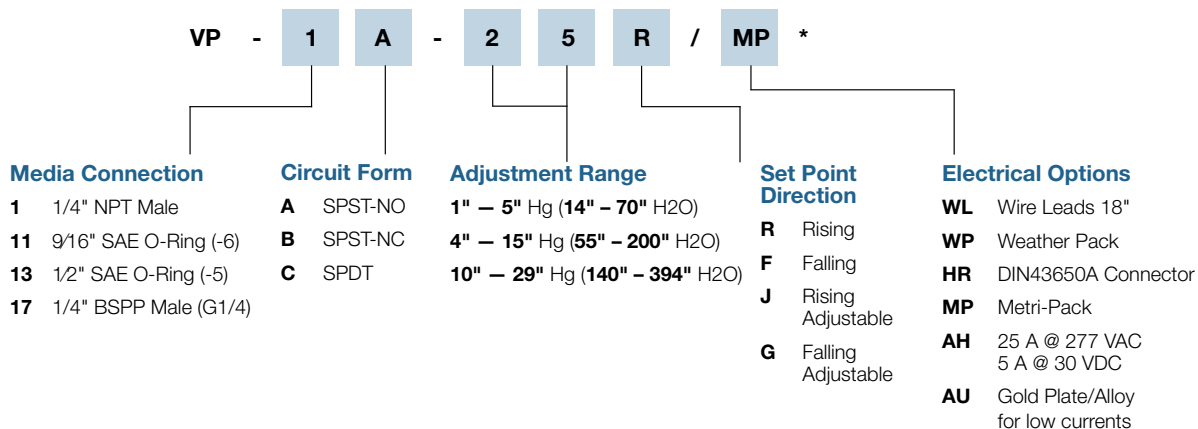

* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.