


RI-CT240 Series

Three Phase Moulded Case Current Transformers



- From 60A to 200A Primary currents
- 5A Secondary output
- Sealable terminal cover
- Supplied with DIN Rail mounting clip, Busbar fixings and mounting feet
- Compact design
- Indication of primary current flow (arrows on case body)
- 30 x 15.5mm busbar/cable apertures
- 25mm bar centres
- 75mm width

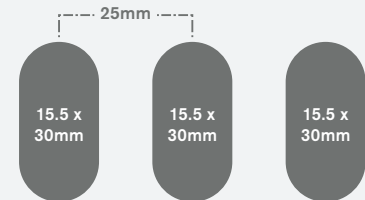

Product Description

The RI-CT240 Series forms part of a family of solid core three phase moulded case current transformers from Rayleigh Instruments.

These transformers are suitable for monitoring current flow in commercial, industrial or utility applications. They are designed to connect any standard metering or relay product requiring a 5A output and are available with Primary current input ranges from 60A to 200A.

The RI-CT240 Series have been designed to fit a standard moulded case breaker size and are supplied with both DIN rail clip and fixing feet. They also have clear markings moulded into the case to indicate the correct direction of primary current flow to minimise installation errors.

Parameters

Primary Current A	Burden			Order Code
	Class 0.5 VA	Class 1 VA	Class 3 VA	
60	Special Order - available on request**			0060
100	-	2	3	0100
125	-	2	3	0125
150	2	2.5	3	0150
160	2	2.5	3	0160
200	2	2.5	3	0200

Available with 5A Secondary

Rated Standard

Rated Primary Current (I_{pr})	60...200A
Frequency Range (f_R)	47...63Hz
Rated continuous over current (I_{cth})	1.2 x rated current
Rated short time thermal current (I_{th})	<60 I_n
Rated dynamic current (I_{dyn})	2.5 I_{th}
Instrument security factor (FS)	≤5
Rated Secondary output (I_{sr})	5A
Accuracy class	Class 0.5, 1 and 3 to IEC/EN61869-2 (**Special Order - call for details)

Insulation

Insulation type	Dry transformer, air insulation; Class B
Highest voltage (U_m)	0.72kV r.m.s.
Rated insulation level	3kV r.m.s. 50Hz/1 min

Environmental Conditions

Reference temperature	23°C ±1°C
Nominal temperature range	-20°C...40°C
Daily mean temperature	≤30°C
Limit temperature range for storage	-40°C...85°C
Relative humidity	≤85% non condensing


Housing

Housing material	Self extinguishing polycarbonate
Protection degree (IEC/EN60529)	IP40 housing, Terminals IP20
Mounting	Foot mounting, or snap on 35mm DIN rail mounting
Weight	≤500g

Connections

Primary winding	Passing cable
Secondary winding	Screw clamp connection - 6mm ² Max.

Dimensions (mm)

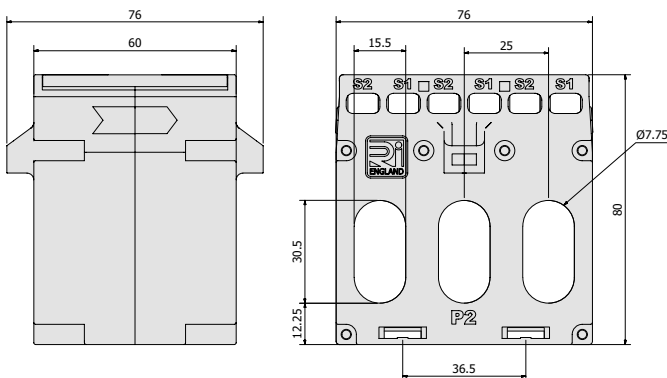

Accessories

The RI-CT240 series of current transformers come supplied with a robust DIN rail clip, busbar mounting clamp and fixing feet.



Information Required with Order

Build your order number - example	RI-CT240	5A	0200
Model			
Secondary Current			
Primary Current Range - See Parameters Table 'Order Code'			