

RI-ENERGYFLOW-MODULAR



Modular Inverter & Battery Solution for Solar and Energy Storage

Product Description

The RI-ENERGYFLOW-MODULAR system is a family of modular inverters and battery storage units.

This elegant energy storage solution is available with a choice of two inverters:-

RI-ENERGYFLOW-MODULAR-3.68kW

RI-ENERGYFLOW-MODULAR-5.00kW

Once you have decided on the inverter that is right for your needs you also have a choice of 4 battery sizes from 5.12kWh to 20.40kWh:-

RI-ENERGYPACK-MODULAR-5.1

RI-ENERGYPACK-MODULAR-10.2

RI-ENERGYPACK-MODULAR-15.3

RI-ENERGYPACK-MODULAR-20.4

The units are supplied in an integrated modular housings that are easy to install and easy on the eye.

- Modular single phase storage solution
- Choice of 2 inverters and 3 battery sizes
- Solar input array sizes - 4.8kW, 6.5kW
- Power output versions - 3.68kW, 5kW
- Choice of 5.12kWh, 10.24kWh, 15.36kWh or 20.40kWh battery sizes
- Back-up, self-use, off-grid and force time user modes
- Easy indoor or outdoor installation - IP65 rated
- Can be configured to operate as a back-up supply
- Short Circuit, AC Leakage, Grounding, Anti-islanding, Overload, Surge, Temperature and DC Polarity protection
- Simple operation - Programmable software, App control and remote cloud monitoring

Inverters / Battery Configurations

RI-ENERGYFLOW-MODULAR
Inverter (3.68kW or 5kW)

EMS Display Screen

Cable Box
(connected to inverter)

RI-ENERGYPACK-MODULAR
Battery Unit



Technical Data - Inverters

RI-ENERGYFLOW-MODULAR-	3.68kW	5.00kW
PV input data		
Max. PV-generator power	4800W	6500W
Max. DC Voltage	580V	
Nominal voltage	400V	
MPPT Voltage Range	120...550V	
Start-up Voltage	130V	
Max. DC current (Input A / Input B)	15A / 15A	
Numbers of MPPT	2	
Strings per MPPT	1	
Max. Short-circuit current per MPPT	18A	
Type of DC Connector	MC4	
AC Output data (On-gird)		
Nominal AC power	3680W	5000W
Max. Input current	32A	
Max. AC Power	3680W	5000W
Max. AC Current	16A	22A
Nominal AC Voltage	230V	
Grid frequency/ range	50/60Hz (±5Hz), (adjustable)	
Output Power factor	0.8 leading ~ 0.8 lagging (adjustable)	
Output THDi (@Nominal Output)	<3%	

RI-ENERGYFLOW-MODULAR-	3.68kW	5.00kW
AC Output data (Back-up)		
Max. Output Apparent Power	4000VA	5000VA
Nominal Output Voltage	230V (Fluctuation range $\pm 0.2\%$)	
Nominal Output Frequency	50/60Hz (Fluctuation range $\pm 0.2\%$)	
Max. Output Current	16A	20A
Harmonic distortion [THD] at rated output	<2% (Linear load)	
Peak power [VA], Duration	6900VA, 10s	
Battery Input Data		
Battery Type	LFP (LiFePO4)	
Nominal Battery Voltage	51.2V	
Max. Charging Voltage	57.6V	
Max. Charging/Discharging Current	50A / 80A	100A / 100A
Communication interfaces	RS485 / CAN	
Efficiency		
Max. efficiency	97.6%	
Euro efficiency	97%	
Max. Battery to Load Efficiency	94%	
Battery charged by PV Max. Efficiency	98%	
General data		
Dimension [W x H x D]	540 x 640 x 240 mm	
Weight	32kg	
Mounting	Wall fixing	
User Interface	LCD/App	
Communication	RS485 / CAN2.0 / WIFI / 4G	
Operating Temperature Range	0°C...+55°C (Charging) / -20°C...+55°C (Discharging)	
Relative Humidity	0...95% (No condensation)	
Operating Altitude	<2000m	
Standby Self Consumption	2W per module	
Topology	Battery Isolation	
Cooling	Natural Convection	
Protection Grades	IP65	
Noise	<25db	
Warranty	5year Product Warranty, 10 Year Performance Warranty*	
Protection	Bipolar DC Switch Protection (125A/Pole) DC Isolator Switch Anti-islanding Protection Output Overcurrent Protection DC Reverse Polarity Protection String Fault Detection AC/DC Surge Protection - DC Type II, AC Type III Insulation Detection AC Short-circuit Protection	

Certification & Standards

Grid Regulation	IEC60529, IEC60068, IEC61683, IEC62116, IEC61727, EN50549-1, AS4777.2, NRS097, VDE-AR-N-4105, CEI0-21, G98, G99, C10/C11
Safety Regulation	IEC 62109-1, IEC 62109-2
EMC	IEC/EN61000-6-1, IEC/EN61000-6-2, EN61000-6-3, IEC/EN61000-6-4, IEC/EN61000-3-11, EN 61000-3-12

Technical Data - Batteries

RI-ENERGYPACK-MODULAR-	5.1	10.2	15.3	20.4
Nominal Energy	5.12kWh	10.24kWh	15.36kWh	20.40kWh
Voltage Range	44.8V...56.5V			
Nominal Voltage	51.2V			
Max. Charging Current	50A	100A	100A	100A
Max. Discharging Current	80A	100A	100A	100A
Battery Type	LFP (LiFePO4)			
Communication	CAN and RS485 compatible			
Max. Storage Period	6 months			
Humidity Range	0...95%			
Ambient Temperature	-10°C...50°C (Charging) / -10°C...50°C (Discharging)			
Storage Temperature Range	-20°C...50°C			
IP Grade	IP65			
Battery weight	Approx. 54Kg	Approx. 108Kg	Approx. 162Kg	Approx. 216Kg
Nominal Energy(kWh)	5.1kWh	10.2kWh	15.3kWh	20.4kWh
Max Power(kW)	4.096kW Charge / 2.825kW Discharge	5.65kW Charge / 5.12kW Discharge	5.65kW Charge / 5.12kW Discharge	5.65kW Charge / 5.12kW Discharge
Cycle Life	10,000			
Charging Current(A)	50A (3.6kW Inverter) / 100A (5kW Inverter) (for inverter only)			
Discharge Current(A)	80A (3.6kW Inverter) / 100A (5kW Inverter) (for inverter only)			
Ventilation type	Passive Cooling			

Certification & Standards

Regulations	IEC/EN 62619;UN38.3
-------------	---------------------


NOTE:

1. The Maximum current is determined by the smaller value between the maximum current ratings of the inverter and the battery pack.

For example, if the configuration is "one 3.68kW inverter" + "two battery pack", then the maximum current is 50A for charging and 80A for discharging.

2. The cooling method for battery pack is natural convection. For the inverters, active cooling is used for the 5kw unit and passive cooling for the 3.68kw unit.

Dimensions (mm)

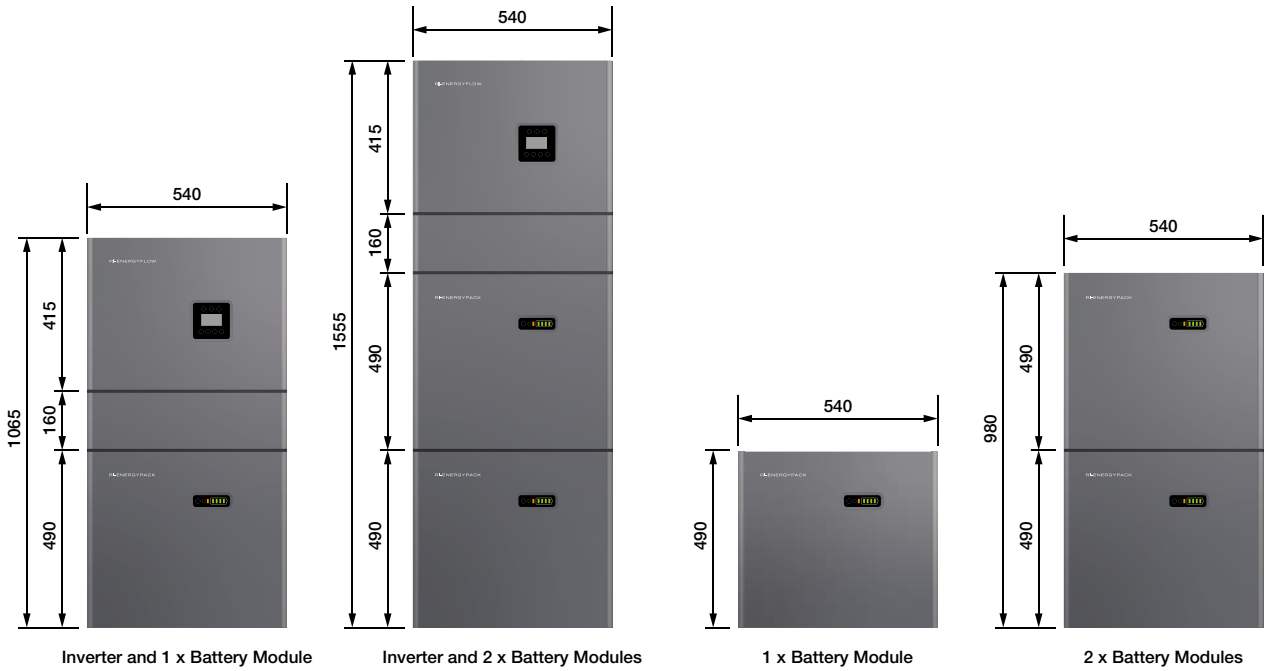

Model Selection Table

Inverter and Battery Size	Model
3680W AC output Inverter with 5.12kWh Battery Storage	RI-ENERGYFLOW-MODULAR-3.68kW/5.12kWh
3680W AC output Inverter with 10.24kWh Battery Storage	RI-ENERGYFLOW-MODULAR-3.68kW/10.2kWh
3680W AC output Inverter with 15.36kWh Battery Storage	RI-ENERGYFLOW-MODULAR-3.68kW/15.3kWh
3680W AC output Inverter with 20.40kWh Battery Storage	RI-ENERGYFLOW-MODULAR-3.68kW/20.4kWh
5000W AC output Inverter with 5.12kWh Battery Storage	RI-ENERGYFLOW-MODULAR-5.00kW/5.12kWh
5000W AC output Inverter with 10.24kWh Battery Storage	RI-ENERGYFLOW-MODULAR-5.00kW/10.2kWh
5000W AC output Inverter with 15.36kWh Battery Storage	RI-ENERGYFLOW-MODULAR-5.00kW/15.3kWh
5000W AC output Inverter with 20.40kWh Battery Storage	RI-ENERGYFLOW-MODULAR-5.00kW/20.4kWh